


Ball Valves Class 150 FIRE SAFE 2000WOG API607



Pressure Temperature Rating

1. **Nominal Pressure:** 2000 WOG
2. **Strength Test:** 20.6 MPa
3. **Seal Test:** 15.1 MPa
4. **Air Seal Test:** 0.6 MPa

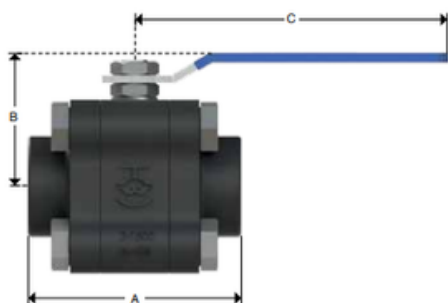


Dimension: mm Weight: kg

SIZE	A	D	B	C	Weight
1/2"	108	89	72	160	1.1
3/4"	117	98.5	92	160	1.7
1"	127	108	105	160	1.8
1 1/4"	140	117	91	160	3
1 1/2"	165	127	125	180	4.6
2"	178	152	135	230	8
2 1/2"	191	178	153	400	11
3"	203	190	172	400	16
4"	229	229	210	400	30
6"	394	279	303	800	90
8"	457	343	352	800	150

Technical sheet - June 2025

Industry Standards

Steel Valves: ASME B16.34
Face-to-Face: MFG"S
Flange Dimensions: ASME B16.5
Fire Safe: API 607
Basic Design: ASME B16.34
TESTING: API 598
Body: Three Pieces
Connection: SW and NPT

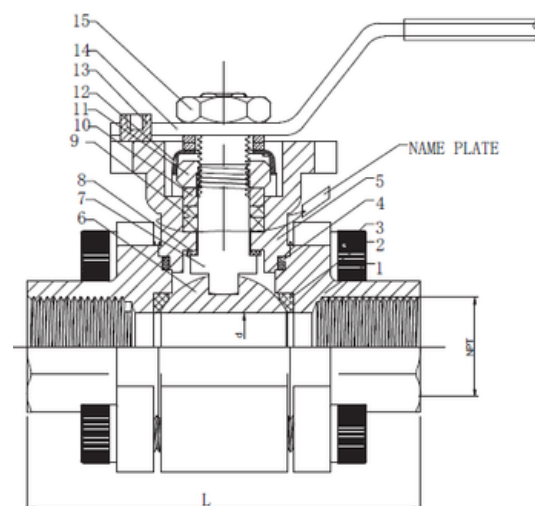

ITEM	NAME	MATERIAL
1	Bonnet	A216 WCB
2	Seat	Devlon
3	Screws	SS304
4	Middle Cushion	SS304+Garphite
5	Body	A216 WCB
6	Ball	SS316(Soild)
7	Stem	SS316
8	Thrust Pad	PTFE
9	Fillers	Garphite
10	Ring Press	SS304
11	Hexagonal Nut	SS304
12	Loose cover	SS304
13	Bolt	A193 B8
14	Handle	201+PVC
15	Nut	A194 8

Features and measurements subject to change